



### PRODUCT ADVANTAGES

- **COMPACT** under counter glass washer
- **LOW VOLUME** (8litre) single sheet deep drawn wash tank - no welds
- **EFFICIENT & GUARANTEED** - 2.5 litres / cycle water consumption - rinse pump included as standard
- **Electronic control** with temperature indication
- **2 CYCLES:** 90 / 180 secs - Nominal capacity up to 30 racks/h
- **HEAT AND NOISE INSULATED** - double walled housing and heat insulated front door
- **Smooth opening counter balanced door**
- **Removable tank strainer, coarse filter and pump suction casing** to maximise wash results and reliability
- **Optional free-standing reverse osmosis (RO-S) system** for polish free washing
- **Integrated SELF CLEANING** on drain out
- **Top and bottom rotating wash and rinse arms**
- **ACCEPTS 432 x 356mm (17x14" RACKS—stainless steel grid insert** to accept other racks see optional equipment
- **Ready to install** - equipped with: fill/drain hoses, electrical cable & plug(15amp 240V), detergent & rinse aid dispensers, rinse pump, drain pump, back flow preventer (Watermark approved)
- **Supplied with 1 off 432 x 356mm (17x14") glass rack**
- **240 / 50 / 1 - 15amp**
- **MADE IN GERMANY**

### TECHNICAL DATA

Cycle times*	1. 90sec 2. 180 sec.
Water consumption	2.5 l/cycle
Tank capacity	8 litres
Tank heating	0.8 kW
Power supply	240 / 50 / 1
Booster loading Standard	2.1 kW (Interlocked)
Total loading Standard	2.8 kW   15 A
Wash pump	0.6 kW
Rack size	432 x 356 mm (17 x 14")
Loading height	315 mm
Noise level	62 dB (A)
Weight (gross / net)	64 / 58 kg

\*Supplied with 150mm adjustable legs


\* Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

### DIMENSIONAL DRAWING

#### CONNECTIONS

① Drain hose	2,000 mm   ID20/OD25
② Supply hose	2,000 mm   R 3/4"
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

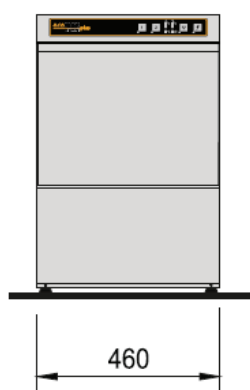

\* Plus 150mm adjustable legs

